

# DIBAL

PRICE COMPUTING  
SCALES

Ovlašćeni zastupnik




Toše Jovanovića 11  
11030 Beograd  
Tel.011/ 65-64-253

www.intraster.rs

# G-400 model



## Dimensions

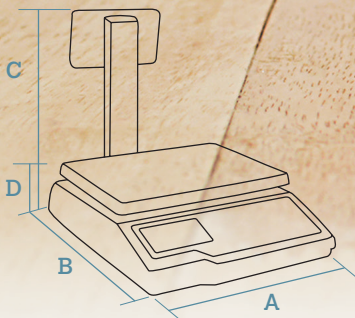

DATA IN mm

A	320
B	400
C	356
D	116

Plate dimensions: L305 x W235 mm.



LCD  
SEGMENT  
DISPLAY



UP TO  
100 PLUs



RS-232



USB

## Characteristics and functionality

### Main characteristics

- Price computing electronic scale without printer.
- USB or RS-232 interface: firmware and communication protocols upgradeable from PC.
- Power via USB: up to 80 hours of autonomy in energy saving mode with external battery of 5,600 mAh (approximate data).

### Features

- EAN heading programming (according to communication protocol).
- Tare, fix tare and manual zero.
- Fix price: to operate several times with the same article.
- Display of price in a secondary currency.
- Energy saving via programmable on and off back lighting switching and automatic disconnection.

### Capacity / Accuracy

- Multi-range (3,000 divisions): 6 kg / 2 g - 15 kg / 5 g.
- Optional:
  - Multi-range (3,000 divisions): 15 kg / 5 g - 30 kg / 10 g.
- Flat and pole in the same scale: the tower is included in the packaging and is easily installable.

### Construction

- Structure: ABS plastic casing.
- Displays:
  - 5 digits high-contrast
  - LCD segment display in vendor and buyer side.
  - Show weight, price / kg and total.
- Keypad with 32-keys.
- Plate: Flat.- Material: Stainless steel.

### Communication to PC / POS / ECR

- USB and RS-232 interface.
- Multi-protocol: communication protocol is selected in the scale (40 protocols available). More protocols can be added from PC by telecharge (maximum: 60 protocols more).
- "OPOS" driver.

### Power supply

- USB: 5 V / 260 mA with AC/DC adapter or through the connected POS.

**Energy consumption** 1.5 W (approx.).

### Accessories



#### Italian plate

L357 x W235 x H55 mm.

The Italian plate is placed on the flat plate. A new weight adjustment might be necessary. Consult.

### Models

Models	Displays	PLUs	Direct PLUs	Communication protocols	Power	Capacity / Accuracy	Reference
G-425 F/P	LCD Segment	100	9x2	Up to 100	Mains / Others	6 kg / 2 g - 15 kg / 5 g	7G401A0LNE_